

SPECS



XSCACE

Proprietary Tech



Nano
Resonance



PrecisionXover
Array



AeroFrame
Chassis



PowerDense
Dynamics



PsySculpt™



XS Flow

XSCACE

WILLOW

Contact: support@xscace.com

*All measurements made at Canadian Audio Labs
Facility

Updated February 2024

WILLOW

DIMENSIONS
(INCHES)

H: 24.01



D: 4.33

W: 13.89


DRIVER: 2 X 6.5" DRIVERS | 1 X 5" DRIVER |
1 X 1" CERAMIC DOME

TOTAL MASS: 11.12 KGS


HOUSING MATERIAL: WOOD

WILLOW

SENSITIVITY

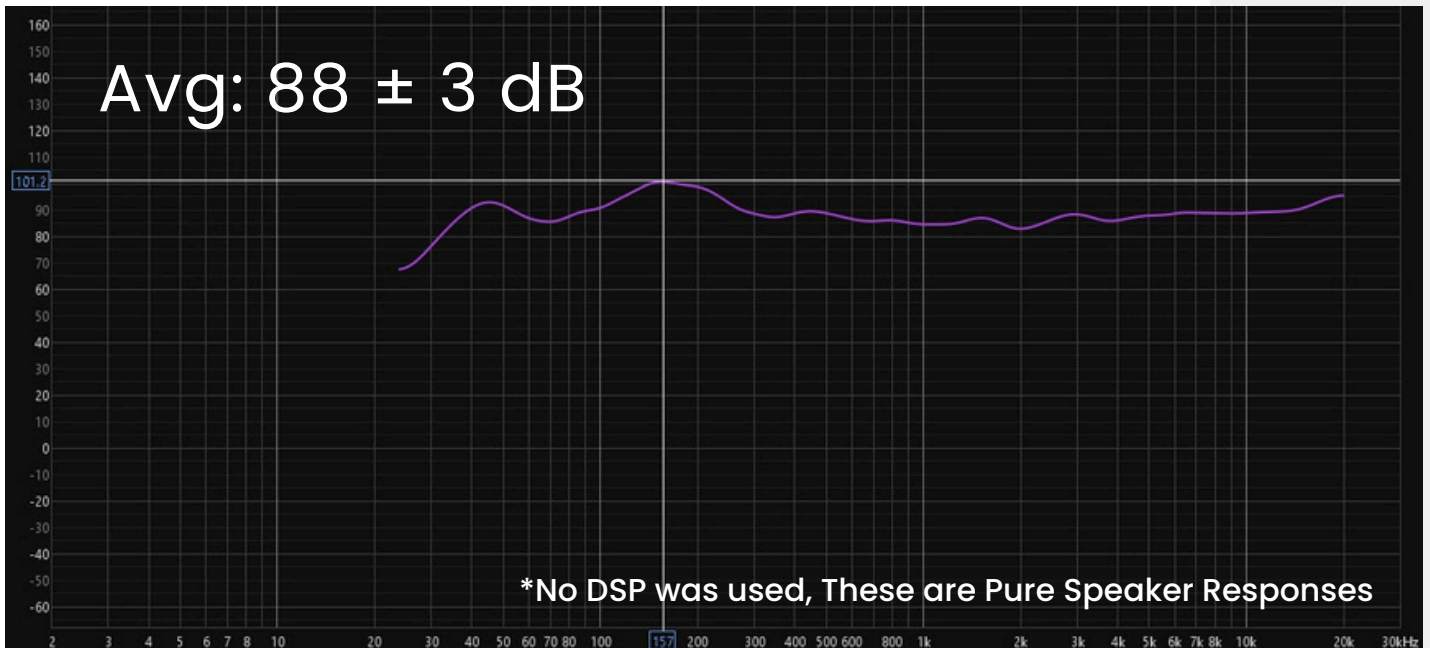

FREQUENCY RESPONSE

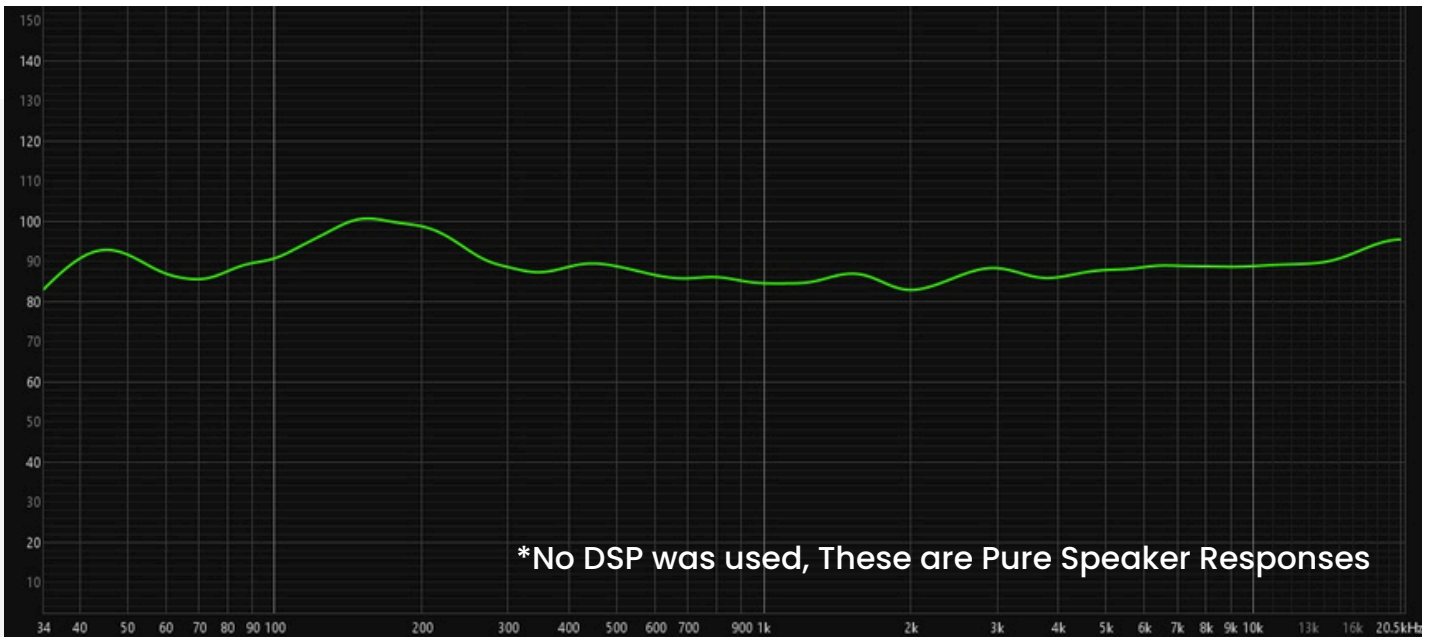


IMPEDANCE: 8 OHMS

*Measurement made on DATS v3

POWER RMS: 300 W

POWER MAX: 400 W

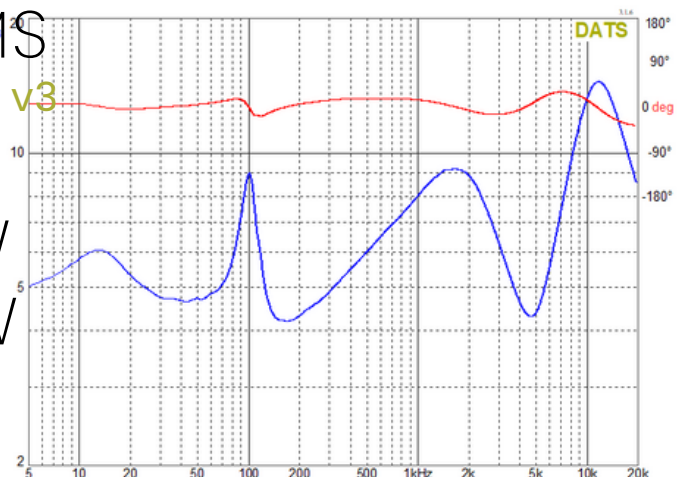


WILLOW

DIRECTIVITY & COVERAGE



0 - 180 DEGREES

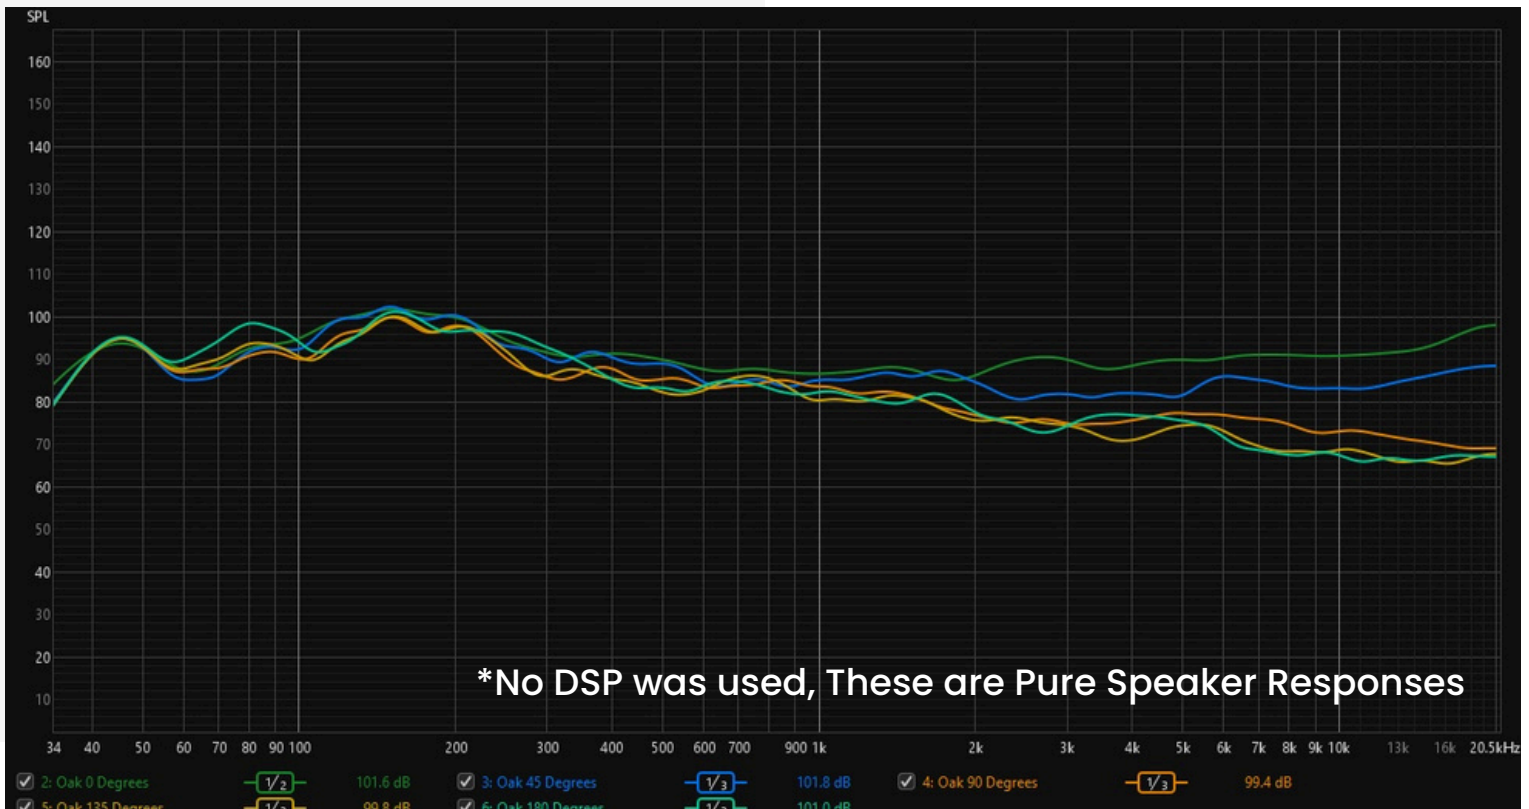

WILLOW

SPEAKER THROW



USING INVERSE SQUARE LAW

$$\text{SPL(UNKNOWN DIST)} = \text{SPL(KNOWN DIST)} - 20 \cdot \text{LOG}_{10}(\text{UNKNOWN DIST} / \text{KNOWN DIST})$$

