



XSCACE

Proprietary Tech



Resonance










Contact: support@xscace.com

*All measurements made at Canadian Audio Labs Facility



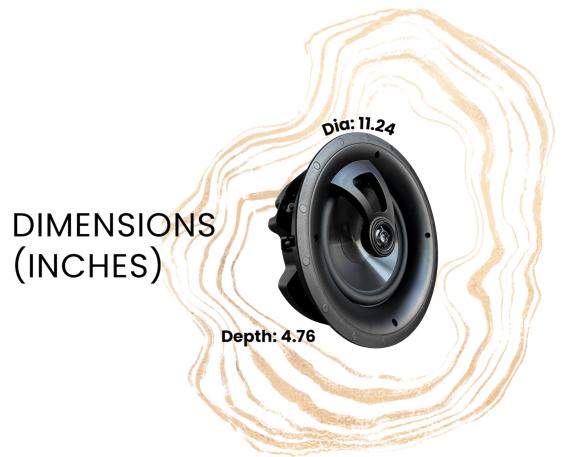


DRIVER: 1 X 8" GRAPHITE CONE, RUBBER SURROUND | 1 X SILK SOFT DOME TWEETER


TOTAL MASS: 2.1 KGS

HOUSING MATERIAL: ABS

SENSITIVITY

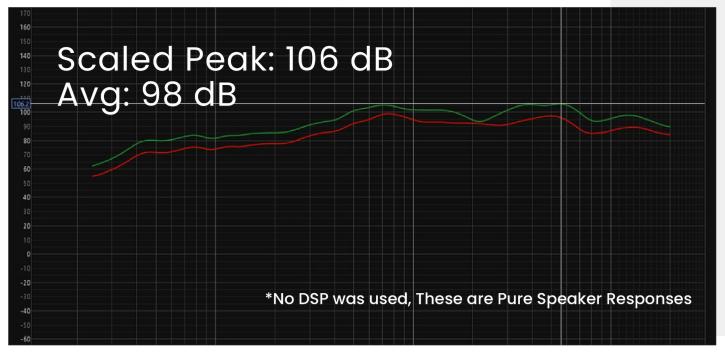


FREQUENCY RESPONSE

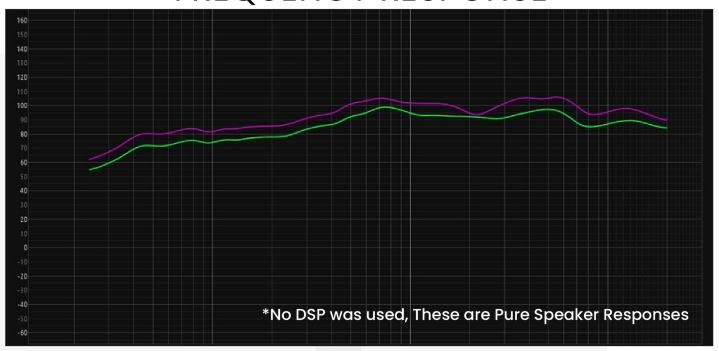

IMPEDANCE: 8 OHMS
*Measurement made on DATS v3

POWER RMS: 120 W POWER MAX: 150 W

DIRECTIVITY & COVERAGE

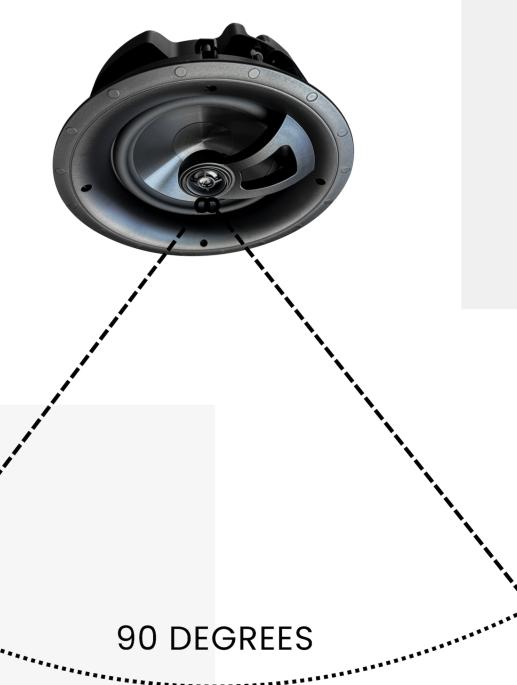



SPEAKER THROW



USING INVERSE SQUARE LAW

SPL(UNKNOWN DIST) =
SPL(KNOWN DIST) - 20·LOG10(UNKNOWN DIST/KNOWN DIST)

